

ELIMINATOR™ SLURRY PUMPS

Curve (LH8-16-75-AS-1200)

Liquid End Model	Discharge Size	Impeller Diameter	RPM	Spray Holes
LH8	8 (200)	16.75 (425)	1200	Yes
Curve #	Suction Size	Max. Particle Size	Construction	Agitator
LH8-16-75-AS-1200	10 (250)	2-1/2 (64)	28% High Chrome	Yes

Total Head
M. Ft.

80 260

75 240

70 220

65 200

60 180

55 160

50 140

45 120

40 100

35 80

30 60

25 40

20 20

15 0

10


5

0

US GPM

Capacity

M³/min

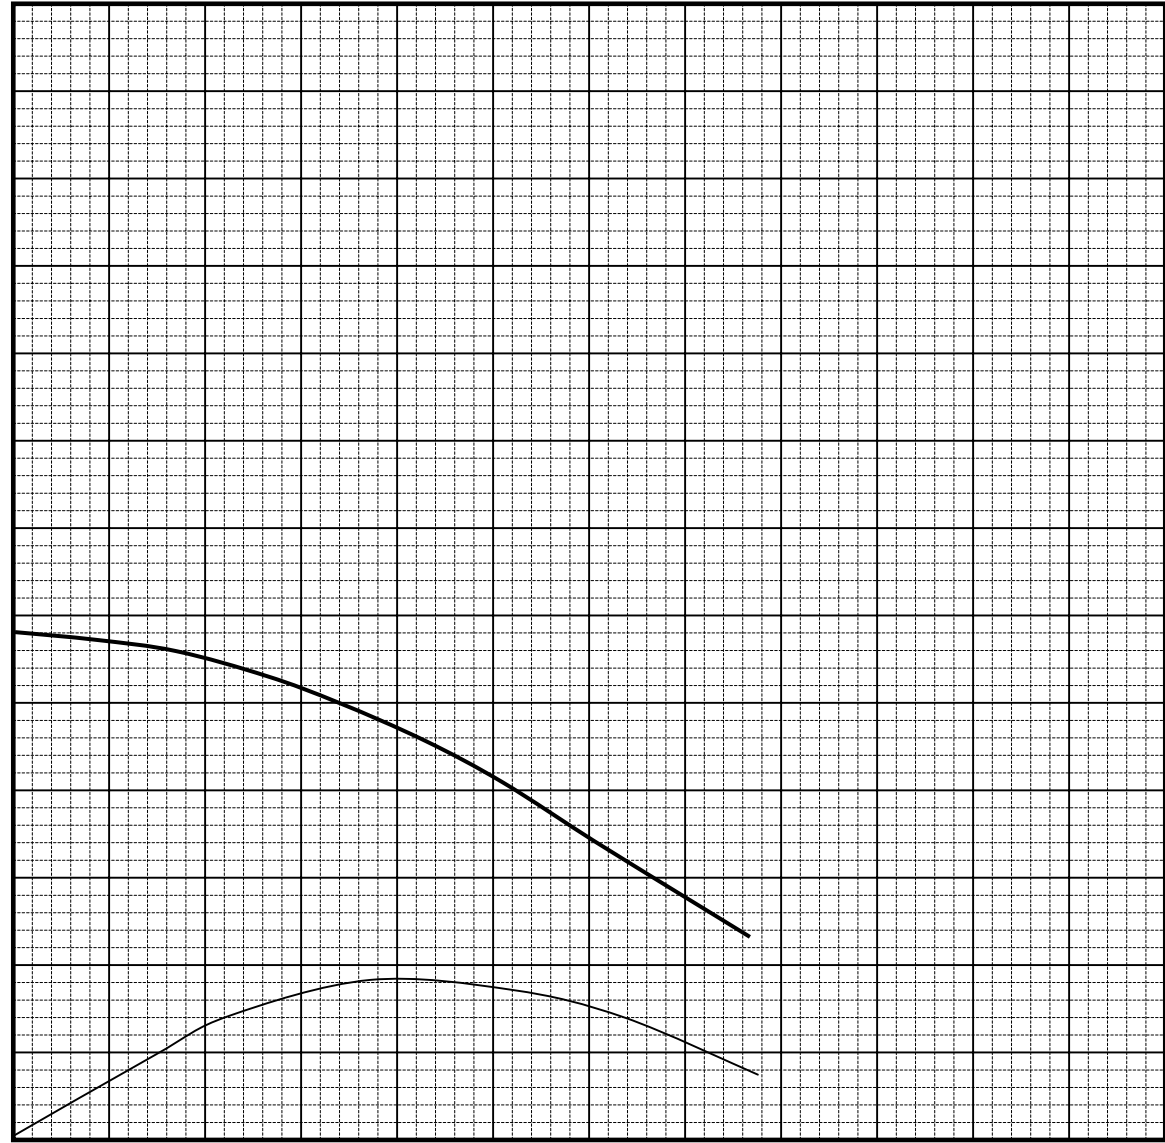

Eff %

100

75

50

25

0 500 1,000 1,500 2,000 2,500 3,000 3,500 4,000 4,500 5,000 5,500 6,000

0 2.0 4.0 6.0 8.0 10.0 12.0 14.0 16.0 18.0 20.0 22.0

Shaft Power

KW BHP


130.50 175

111.86 150

93.21 125

74.57 100

55.93 75

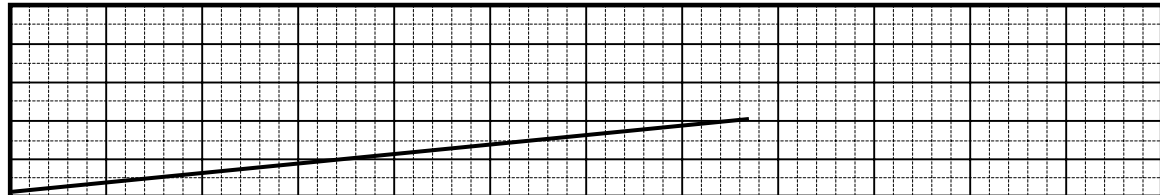

GPM inc.

Engineered Sales, Service & Manufacturing
4432 Venture Ave. | Duluth, MN 55811
Ph. (218) 722-9904 Fx. (218) 722-2826
<http://www.gpmco.com/>

Certified Performance Curve

By:

Date: